


Technical Data

Dimensions

Accessories



Flow diagram
drukosep

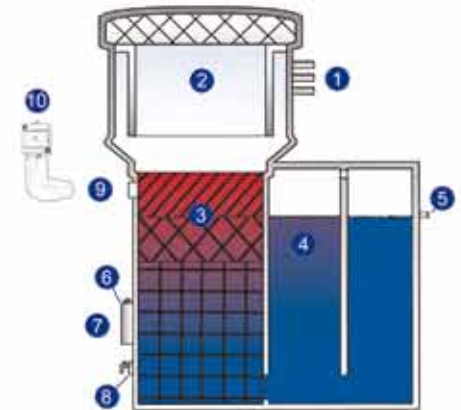

- 1 Condensate inlet
- 2 Exhaust air filter
- 3 3-stage-combifilter
- 4 Safety chamber
- 5 Water discharge
- 6 Testset
- 7 Document pocket
- 8 Test valve
- 9 Oil-level glass for optical filter control standard at drukosep 6-8-10

Accessoires

- 10 level switch - battery powered
- local alarm and potential free contact
- retrofitable at any time
- 11 Heater - on request
(only for drukosep 6-8-10)



| Model | compressor capacity m ³ /min at 100% charge** | Dimensions (mm) | | | Weight kg | Connections | | Filtering | |
|-------------------|---|-----------------|-------|-------|--------------|------------------|-----------------|-------------|--------------|
| | | height | widht | depth | | condensate inlet | water discharge | Exhaust air | Water filter |
| EPE sep 1 | 1,8 | 445 | 251 | 240 | 5 | 3x 1/2" | 1" | sep1WL | |
| EPE sep 2 | 2,5 | 545 | 251 | 240 | 7 | 3x 1/2" | 1" | sep2WL | |
| EPE sep 3 | 3,5 | 613 | 373 | 254 | 12 | 3x 1/2" | 1" | 1088L | sep3w |
| EPE sep 6 | 6 | 908 | 330 | 330 | 18 | 4x 1/2" | 1" | 1088L | sep6w |
| EPE sep 8 | 10 | 962 | 595 | 375 | 25 | 4x 1/2" | 1" | 1088L | sep8w |
| EPE sep 10 | 12 | 985 | 821 | 513 | 35 | 4x 1/2" | 1" | 1088L | sep10w |